


# Perimeter Edge Metal

## EverGuard® GAF Continuous Cleat Coping

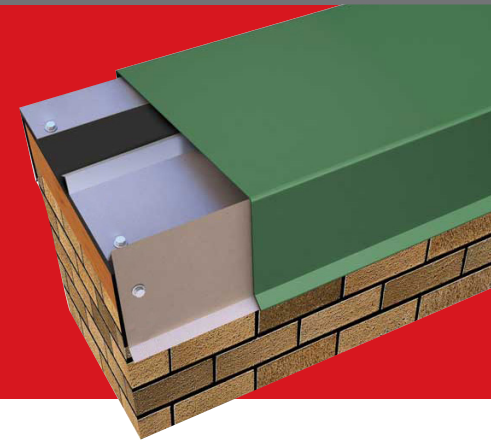

### Description:

EverGuard® Continuous Cleat Coping protects your building's parapet conditions while also complementing their natural aesthetics. We offer a variety of color options, including standard and custom, as well as a variety of finish options, including anodized. Easy-to-install EverGuard® Continuous Cleat Coping gives you design flexibility and great value.

### Features and Benefits:

- 8" concealed splice plates with dual non-curling isocryl butyl sealant strips allow for thermal movement of materials and sealing of joints.
- Factory-fabricated miters provide a clean, aesthetically pleasing appearance and can help save time by eliminating the need for field fabrication.
- 12', 20 ga. continuous cleats on the inside and outside provide quick installation that can help reduce labor costs. Splice plates and fasteners are included.
- Express, standard, and premium colors and finishes are available to meet your job requirements and include a 30-year limited Kynar 500® finish warranty on coil-coated standard colors. For limited warranty details, please visit [gaf.com](http://gaf.com).
- Custom colors are also available. A 10-year limited warranty is included for post-painted Kynar®-coated aluminum applications unless otherwise stated. A 20-year limited warranty may be available upon request for certain colors.<sup>1</sup>

<sup>1</sup> Restrictions may apply; consult a sales representative for specific information.

### Codes/Testing Compliance:

- Tested per ANSI/SPRI/FM 4435/ES-1 Standard to comply with the International Building Code.
- FM-approved for wind uplift protection. See [RoofNav.com](http://RoofNav.com) for specific assemblies.




### Express Colors<sup>1</sup> available for quick shipping<sup>2</sup>



For standard and premium colors, please refer to the GAF color chart, available at [gaf.com/PerimeterEdgeMetal](http://gaf.com/PerimeterEdgeMetal). Custom colors are also available.

<sup>1</sup> Express Colors available in shorter lead times for 24 ga., .040", and .050" only. Standard lead times, which may be longer, apply for 22 ga. and .063".

<sup>2</sup> It is difficult to reproduce the color clarity of these products. Before selecting your color, please contact your local GAF territory manager to request a paint chip for accurate color representation.

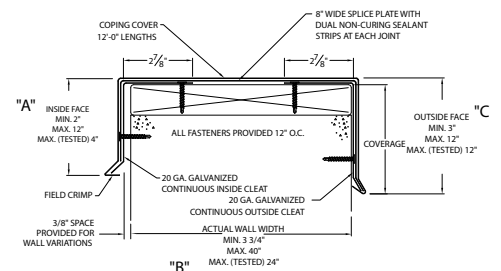

### Product Specifications

| AVAILABLE SIZES        | MINIMUM  | MAXIMUM                                       |
|------------------------|--|---|
| Inside face            | 2.0" (57 mm)   | 12" (304.8 mm)<br>(Max Tested 4" [101.6 mm])  |
| Wall size              | 3.75" (95.2 mm)  | 40" (1,016 mm)<br>(Max Tested 24" [609.6 mm]) |
| Outside face           | 3" (76.2 mm)   | 12" (305 mm)<br>(Max Tested 12" [305 mm])     |
| <b>LENGTH</b>          | 12 ft. (6.10 m)  |   |
| <b>COVER MATERIALS</b> | 24 ga. steel<br>22 ga. steel<br>0.040" aluminum<br>0.050" aluminum<br>0.063" aluminum  |   |
| <b>FINISHES</b>        | Mill aluminum<br>Pre-finished Kynar 500® (See standard color chart)<br>Premium pre-finished Kynar 500® (See standard color chart)<br>Post-finished Kynar 500®<br>Pre-finished anodized aluminum – clear, bronze, or black<br>Post-finished anodized aluminum<br>Custom post-coated Kynar 500® finishes are available |   |



Visit [gaf.com/PerimeterEdgeMetal](http://gaf.com/PerimeterEdgeMetal)

We protect what matters most™

