


LIBERTY™ Self-Adhering Cap Sheet

An SBS-modified, granule-surfaced roofing membrane provides durable protection for residential low-slope areas

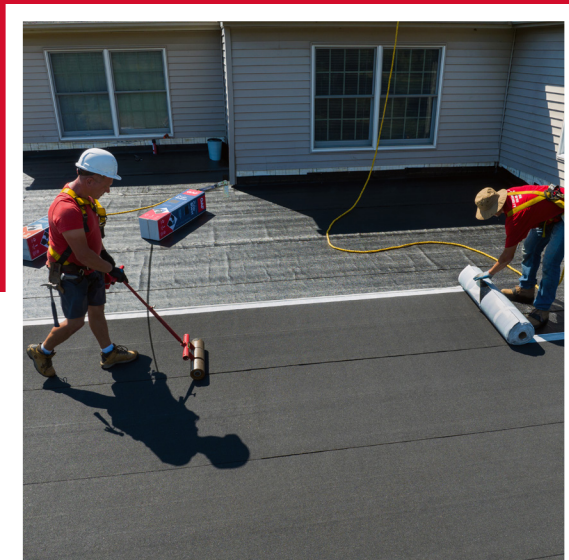

- Perfect for low-slope roofs such as on porches, garages, carports, and sheds
- Self-adhering installation eliminates the need for open flames, hot asphalt, or dangerous chemicals on your roof

LIBERTY™ Self-Adhering Cap Sheet



Description:

LIBERTY™ Self-Adhering Cap Sheet is a durable SBS-modified bitumen, granule-surfaced membrane designed and manufactured to meet relevant industry and code requirements. We reinforced this waterproofing membrane with a polyester mat coated with polymer-modified asphalt.

Advantages:

- LIBERTY™ systems are applied without torches, open flames, or hot asphalt, and are suitable for primed plywood decks and other substrates.
- Available in seven popular colors to help complement Timberline® and other GAF asphalt shingle colors. (Black, Hickory, White, Weathered Wood, Shakewood, Tan, and Slate.)
- Up to 20-Year Limited Warranty against manufacturing defects available, depending on systems.¹

This product meets or exceeds the following ASTM D6164 Type I, Grade G minimum requirements:

Properties	Test Method	Value
Tensile strength @ 0°F (min.), lbf/in.	ASTM D5147	70
Elongation @ 0°F (nom.), %	ASTM D5147	20
Low-temperature flexibility (max.), °F	ASTM D5147	0
Tear strength (min.), lbf	ASTM D5147	55
Dimensional stability, (max.) %	ASTM D5147	1

Note: Values stated are approximate and subject to normal manufacturing variation. These values are not guaranteed and are provided solely as a guide. GAF reserves the right to change or modify, at its discretion, any of the information, requirements, specifications, or policies contained in this document.


Uses:

LIBERTY™ Self-Adhering Cap Sheet is designed to be used with LIBERTY™ Self-Adhering Base/Ply Sheet to help protect low-slope areas (1/4:12 – 3:12) of your roof such as porches, garages, carports, and sheds.

Application:

LIBERTY™ Self-Adhering Cap Sheet is applied to approved substrates using its unique self-adhering formulation. Technical and sales information can be obtained through Technical Services at 877-GAF-ROOF.

Application Standards:

- UL Classified to ANSI/UL790², Class C Roofing Fire Rating 
- Miami-Dade County Product Control Approved 
- State of Florida Approved
- Meets or Exceeds the Requirements of the Texas Department of Insurance.
- ASTM D6164 Type I, Grade G
- UL Evaluation Report UL ER1306-02


Product details:

Roll size	1 square — excludes laps ³ 111.6 gross sq. ft. (10.4 m ²)
Roll length	34.0' (10.4 m)
Roll width	39.375" (1.0 m)
Aprox. roll weight	96.4 lb. (43.7 kg)
Product thickness	0.157" (4 mm)

¹ Exclusions apply. See *Limited Warranty on LIBERTY™ SBS Self-Adhering Materials* for complete coverage and restrictions.

² Refer to UL Product iQ for actual assemblies.

³ Installed coverage will be lower and depend on quantity and width of side and end laps.



For further information on this product, please visit gaf.com/Liberty. For questions on application, contact GAF at **877-GAF ROOF**.

We protect what matters most™

