


Perimeter Edge Metal

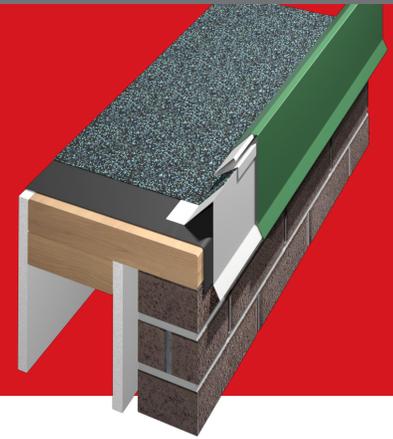

Description:

M-Weld™ NP Fascia is a three-part assembly designed for built-up or modified bitumen roofs. It consists of a continuous galvanized steel water dam, an exterior fascia, and a continuous galvanized steel retainer. Its snap-on cover eliminates crimping, substantially reducing installation time. Dual attachment points on both the face and roof deck allow for added flexibility when accommodating roof irregularities. With no exposed fasteners and no unsightly cover plates, M-Weld™ NP Fascia will complement the building's aesthetics, while also being fast and easy to install.

Features and Benefits:

- Available in 12' lengths with snap-on cover and pre-punched holes for quicker installation and labor savings
- Slotted fastening holes allow for thermal movement of the materials and ensure correct fastener placement and spacing

- Includes all fasteners, splice plates, and 24 ga. galvanized water dam with slotted holes, all shipped to the job site with the product
- Factory-fabricated miters, scuppers, and drainage accessories provide a cleaner, more aesthetically pleasing appearance, which eliminates the need for field fabrication and creates time and labor savings
- Express, standard, and premium colors and finishes are available and include a 30-year limited Kynar 500® finish warranty on coil-coated standard colors. For warranty details, please visit gaf.com.
- Custom colors are also available. A 10-year limited warranty is included for post-painted Kynar®-coated aluminum applications unless otherwise stated. A 20-year limited warranty may be available upon request for certain colors.*

*Restrictions apply; consult your GAF territory manager for more information.

Codes/Testing Compliance:

- Tested per ANSI/SPRI/FM 4435/ES-1 Standard to comply with the International Building Code
- FM-approved for wind uplift protection. See RoofNav.com for specific assemblies



10 Express Colors¹


Express Colors are available for quick shipping to meet your job requirements.² For standard and premium colors, go to the GAF color chart, available at gaf.com/perimeteredgemetal.



Custom colors are also available.

¹ Express Colors available in shorter lead times for 24 ga., .040", and .050" only. Standard lead times, which may be longer, apply for 22 ga. and .063".

² It is difficult to reproduce the color clarity of these products. Before selecting your color, please contact your local GAF territory manager to request a paint chip for accurate color representation.

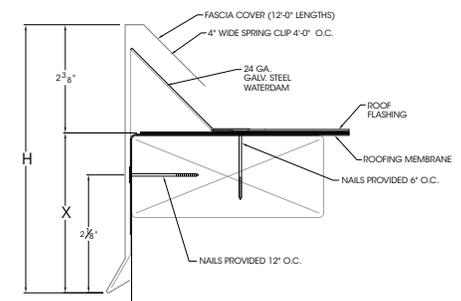

Product Specifications

STANDARD SIZES	5.25" (139.7 mm)
	6.75" (171.45 mm)
LENGTH	8.25" (209.55 mm)
	9.75" (247.65 mm)
	11.25" (285.75 mm)
	12.75" (323.85 mm)
	12 ft. (6.10 m)
MATERIALS	24 ga. steel
	22 ga. steel
	0.040" aluminum
	0.050" aluminum
	0.063" aluminum
FINISHES	Mill aluminum
	Pre-finished Kynar 500® (See standard color chart)
	Premium pre-finished Kynar 500® (See standard color chart)
	Post-finished Kynar 500®
	Pre-finished anodized aluminum - clear, bronze, or black
	Post-finished anodized aluminum
Custom post-coated Kynar 500® finishes are available	
PRE-PUNCHED HOLES	12" (305 mm) o.c.



Visit gaf.com/PerimeterEdgeMetal

We protect what matters most™

