



Tiger Paw™ Premium Roof Deck Protection

Help protect your home and roof system from
damaging moisture with premium roof deck protection

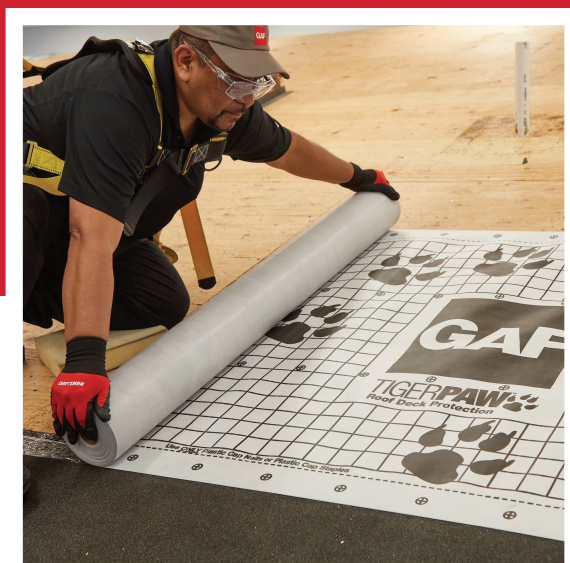

- Provides a critical layer of extra protection between your shingles and roof deck to resist wind-driven rain (or moisture from other sources)
- Offers longer-lasting protection than conventional asphalt felts (which can rot or become brittle over time)
- Avoids wrinkling and buckling for a better-looking finished roof

Tiger Paw™ Premium Roof Deck Protection

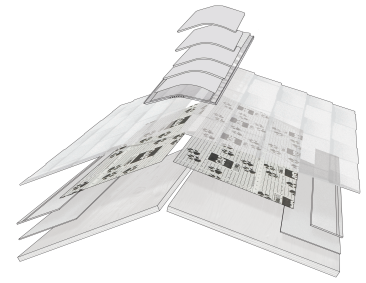

Benefits:

- Premium non-asphaltic, polypropylene construction for long-lasting protection
- Specially designed walking surface and anti-skid back coating help provide excellent walkability for installers
- Moisture-control design helps reduce damaging moisture on the roof deck unlike typical synthetic non-breathable underlayments¹
- Provides at least 600% (i.e., 7 times) greater tear strength² and 147% higher nail-pull strength³ than conventional #30 asphalt felt
- 48-inch-wide (1.22 m) roll provides 33% more coverage than conventional 36-inch-wide (914 mm) asphalt felts
- Light-gray surface is cooler to work on in hot weather than conventional black felts
- Eligible for up to a Lifetime[†] limited warranty. It's also an eligible accessory product in the Roof Deck Protection Category of GAF residential enhanced warranties.

Installation:



Product Details:

Nominal Specifications:

For use with asphaltic shingles and may also be used with slate, wood, metal, or tile⁴

- Roll size: 10 squares (1,000 sq. ft. [92.9 m²]) (excludes laps)
- Roll length: 250' (76.2 m)
- Roll width: 48" (1.22 m)
- Approx. roll weight: 40 lb. (18 kg)
- UV exposure: UV-stabilized polypropylene construction resists UV degradation for up to 180 days⁵

Code Approvals and Standards:

- Meets or exceeds the physical requirements of ASTM D226, Type II and D4869
- Miami-Dade County Product Control approved
- State of Florida approved
- ICC-ES ESR-3286
- CSA A123.3
- Component of a UL Listed ANSI/UL 790 Class A system when used with UL Class A shingles⁶
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment

[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

¹ As per GAF ASTM D570-modified testing.

² GAF trapezoidal tear strength testing per ASTM D4533.


³ GAF nail pull-through testing per ASTM D3462.

⁴ Contact GAF Technical Support at 1-800-766-3411 for acceptable non-asphaltic roofing systems and limited warranty coverage.

⁵ 180-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is NOT related to withstanding water, snow, or wind. While Tiger Paw™ Roof Deck Protection is water resistant, it is NOT WATERPROOF. DO NOT USE Tiger Paw™ Roof Deck Protection as a temporary roof to protect property or possessions.

⁶ Refer to UL Online Certification Directory for actual assemblies.

Note: Always use plastic cap nails or staples with plastic caps to install Tiger Paw™ Roof Deck Protection. Do NOT use nails or staples without caps.



To learn more about the Lifetime[†] Roofing System visit gaf.com/Lifetime



We protect what matters most™

