


NOTE: OPEN PDF IN ADOBE ACROBAT OR ADOBE READER, SELECT THE LAYERS TAB, THEN TURN ON/OFF DESIRED OPTIONS.

FLASHING KEY
• 30" - 66" (762 mm - 1.68 m) REQUIRES BONDING ADHESIVE
• UP TO 30" (762 mm) DRY HUNG

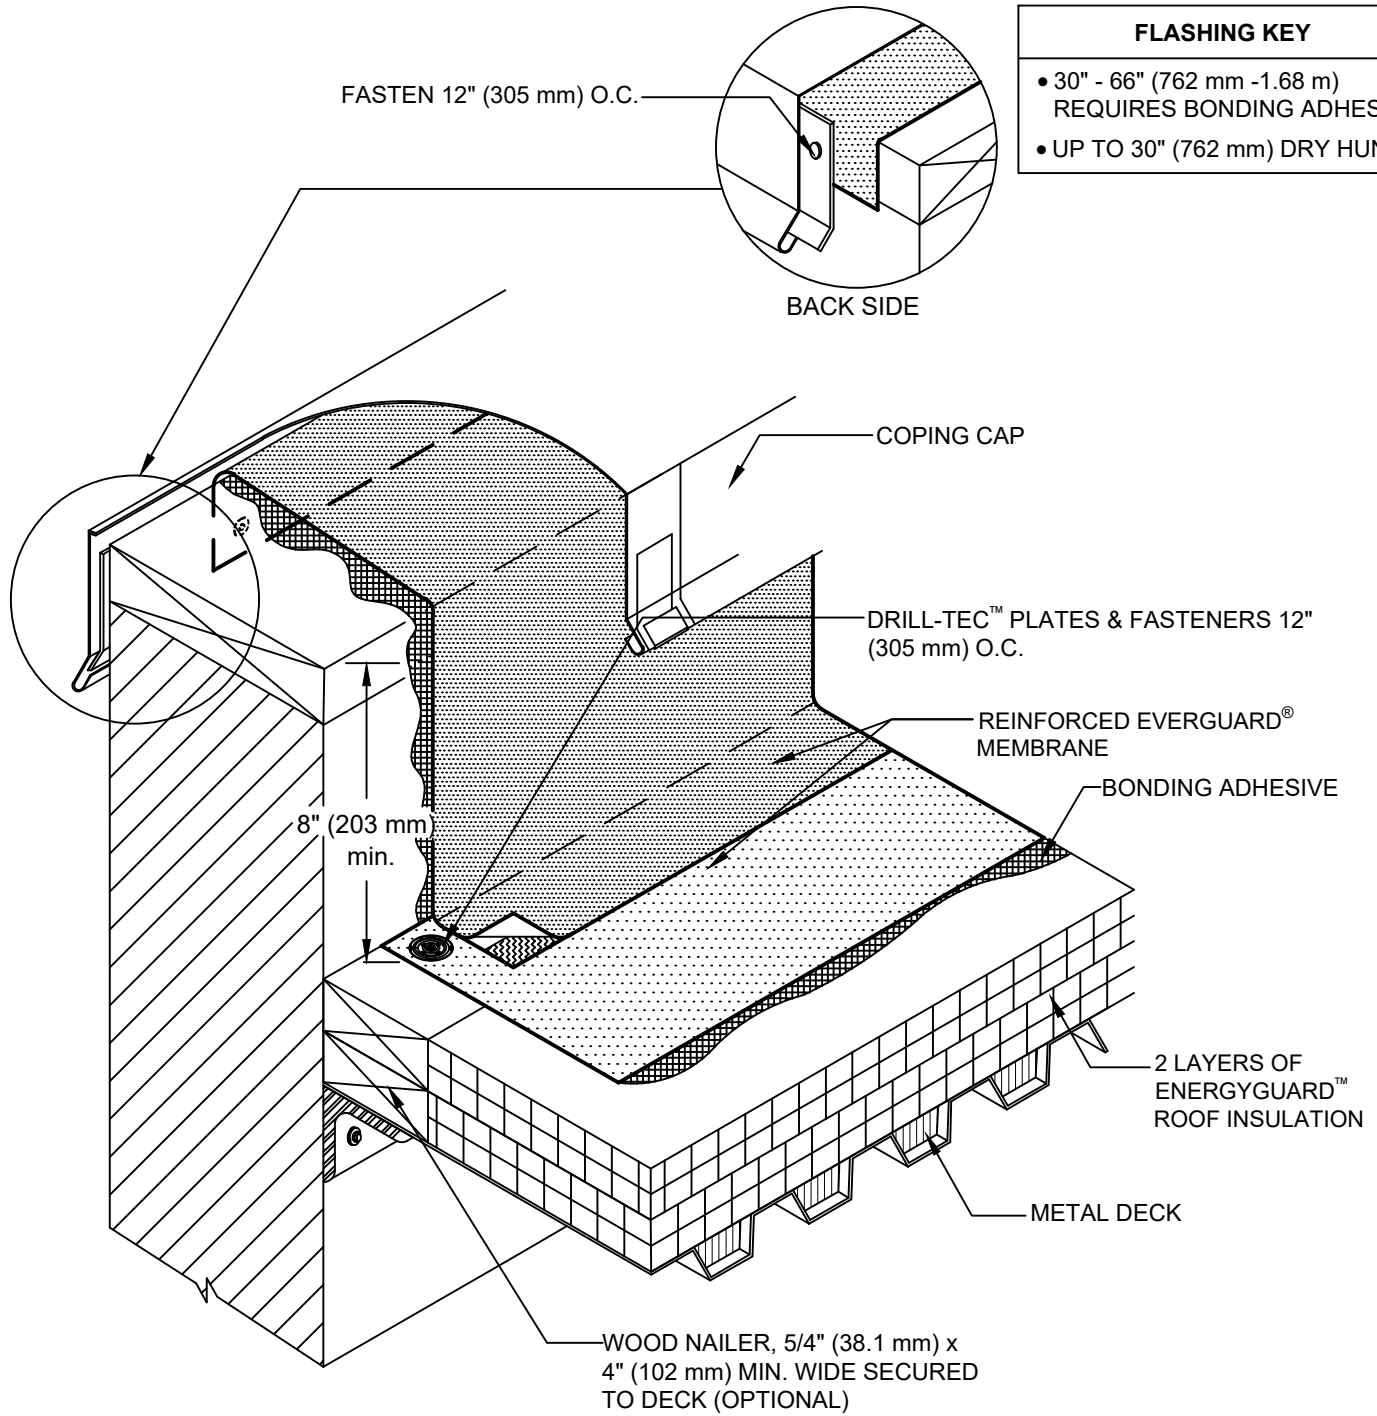

NOTE:

1. THIS DETAIL DRAWINGS IS PROVIDED BY GAF FOR THE SOLE PURPOSE OF OBTAINING A GAF SYSTEM WARRANTY OR GUARANTEE AND IS NOT A SUBSTITUTE FOR PROFESSIONAL DESIGN SERVICES. GAF MAKES NO REPRESENTATION OR WARRANTY WITH RESPECT TO CODE COMPLIANCE OR SUITABILITY OR THIS DETAIL FOR ANY PARTICULAR PROJECT.
2. FOR INSULATION THICKNESS GREATER THAN 8" (203 mm), A COVER BOARD IS REQUIRED ON MECHANICALLY FASTENED SYSTEMS ONLY.
3. IF EVERGUARD® FREEDOM MEMBRANE IS USED, BONDING ADHESIVE IS NOT NEEDED AND WALL MUST BE PRIMED.

LEGEND		WALL FLASHING DETAIL					DETAIL
	HEAT-WELDED	PROJECT:					301
	EVERGUARD® BONDING ADHESIVE	NO.	REVISION	DATE	ISSUE DATE	SCALE	
					6/30/22	N.T.S.	