




M-WELD SNAP-ON COPING

* NOTES

- Oil canning can occur on larger face heights; recommend 22 ga., .050" or .063" for face height above 8"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.
- Welded accessories require a minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 test pressures up to 69 psf (Horizontal) and 121 psf (Vertical) for 24 ga. galv. steel cap on 16" wall
- Contact us for masonry applications

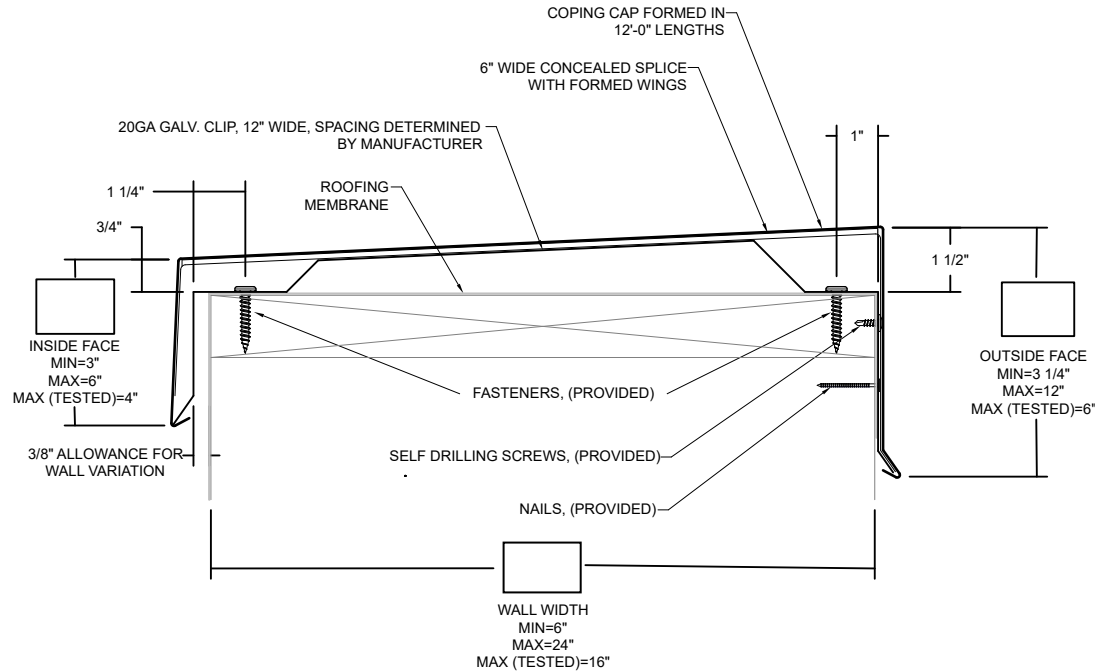

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

GAF
 1 Campus Drive,
 Parsippany, NJ 07054
 USA
 973-628-3000
 WWW.GAF.COM

SHT# 1 of 2

DATE: 09/09/22

DRN BY: PL

CKD BY: KP

DWG #: 25011-37077

REV: A

APPROVALS*

ANSI/SPRI/FM 4435/ES-1
 Test Pressures listed in notes

MATERIAL*

- 24 Ga. Galv. Steel
- 22 Ga. Galv. Steel
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: _____

Color: _____

Finish: _____

Substrate:

if substrate is not given, wood fasteners will be provided.

- Wood
- Masonry
- Metal

QUANTITIES

Accessory Type* : Quicklock (Default) Welded (Surcharge)

_____ Straight Lineal Feet (12'-0" Lengths)

_____ Total Miters (90°) (Inside: ___ | Outside: ___)

_____ Total Endcaps (Left: ___ | Right: ___)

_____ Total Endwall Flashing (Left: ___ | Right: ___)

_____ Transition Miters

_____ T-Miters

_____ Z-Miters

_____ Radius Lineal Feet (Welded) (4'- 0" Lengths)

_____ Radius to Straight Miters (Welded)

_____ Radius End Caps

_____ Vault Lineal Feet (Welded) (4'- 0" Lengths)

_____ Vault to Straight Miters (Welded)

_____ Vault End Caps

_____ Ridge Miters

_____ Valley Miters




M-WELD SNAP-ON COPING

STANDARD ACCESSORIES

NOTES

For special miter and accessory requirements, contact manufacturer for assistance.

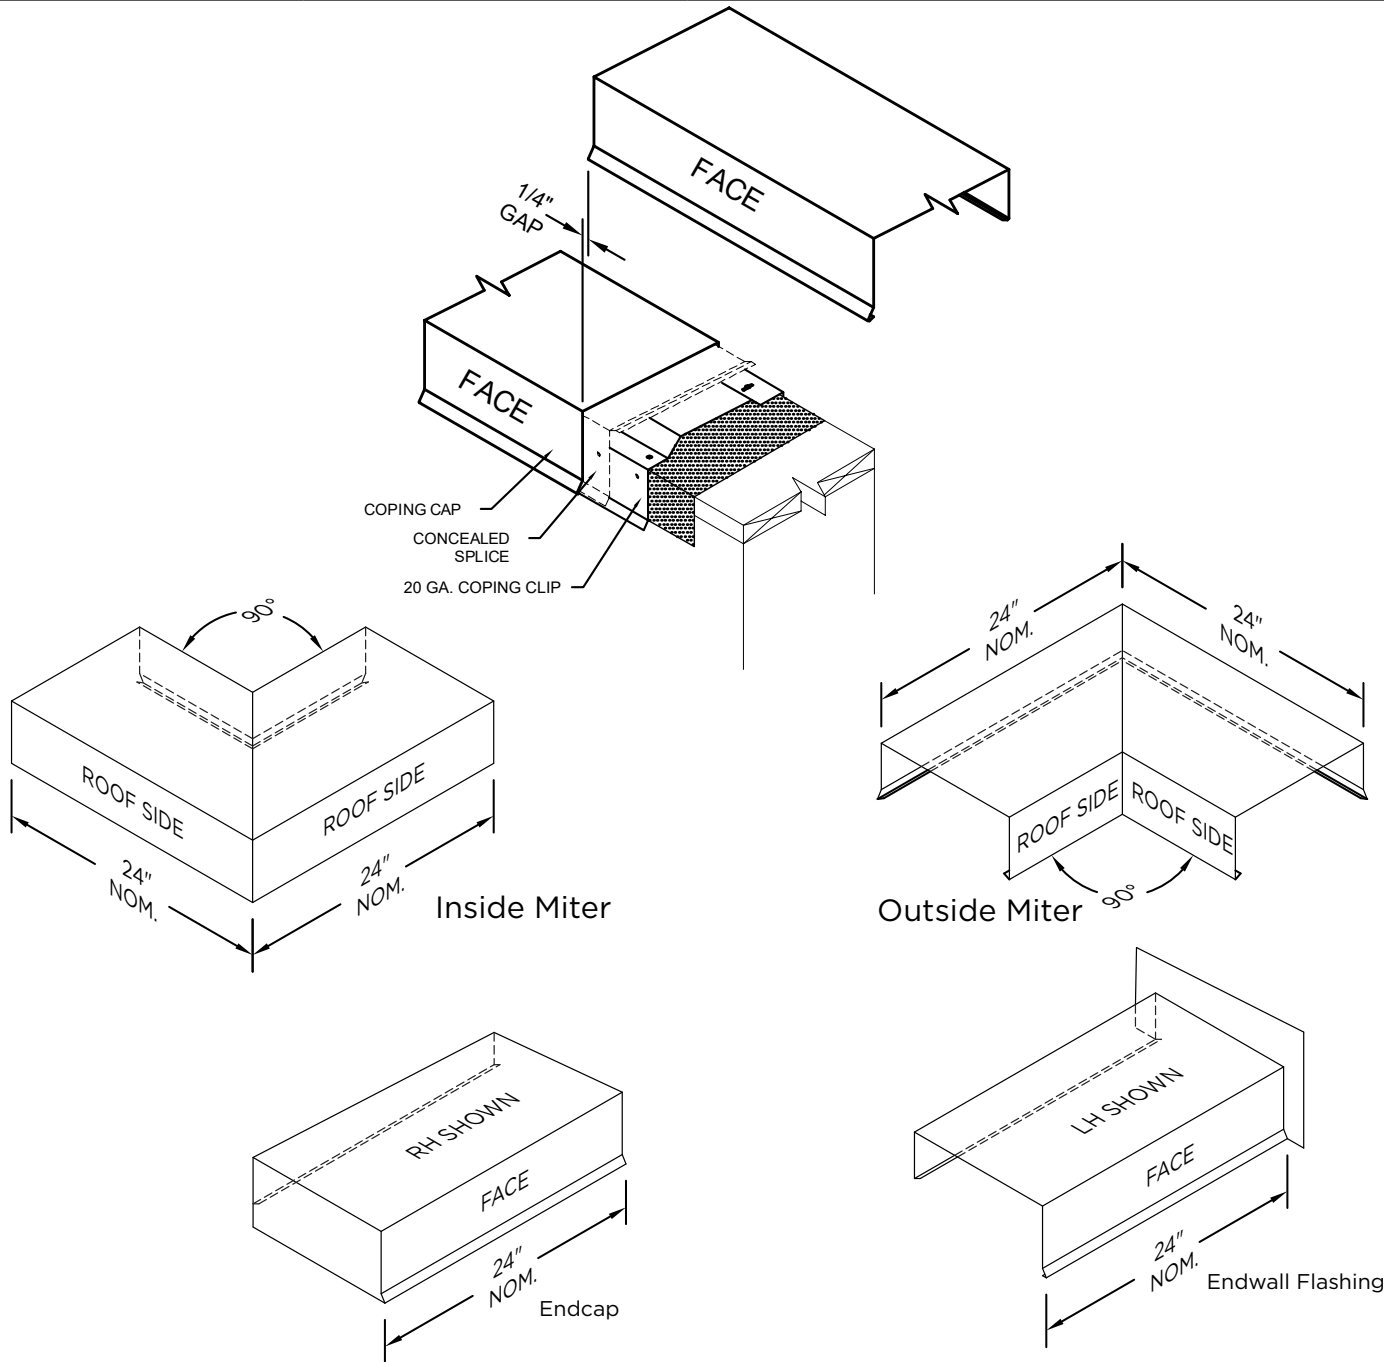

SHT# 2 of 2

DATE: 09/09/22

DRN BY: PL

CKD BY: KP

DWG #: 25011-37077

REV: A

GAF
1 Campus Drive,
Parsippany, NJ 07054
USA
973-628-3000
WWW.GAF.COM