



# M-WELD SNAP-ON PLUS COPING

## \* NOTES

- Oil canning can occur on larger face heights; recommend 22 ga., .050" or .063" for face height over 8"

- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.


- Welded accessories require a minimum material thickness of .050"

- For non-90 miters, see separate print approval

- Product should be installed per provided installation instructions

- ANSI/SPRI/FM 4435/ES-1 test pressures up to 65 psf (Horizontal) and 111 psf (Vertical) for .063" aluminum cap on 24" wall

- Contact us for masonry applications

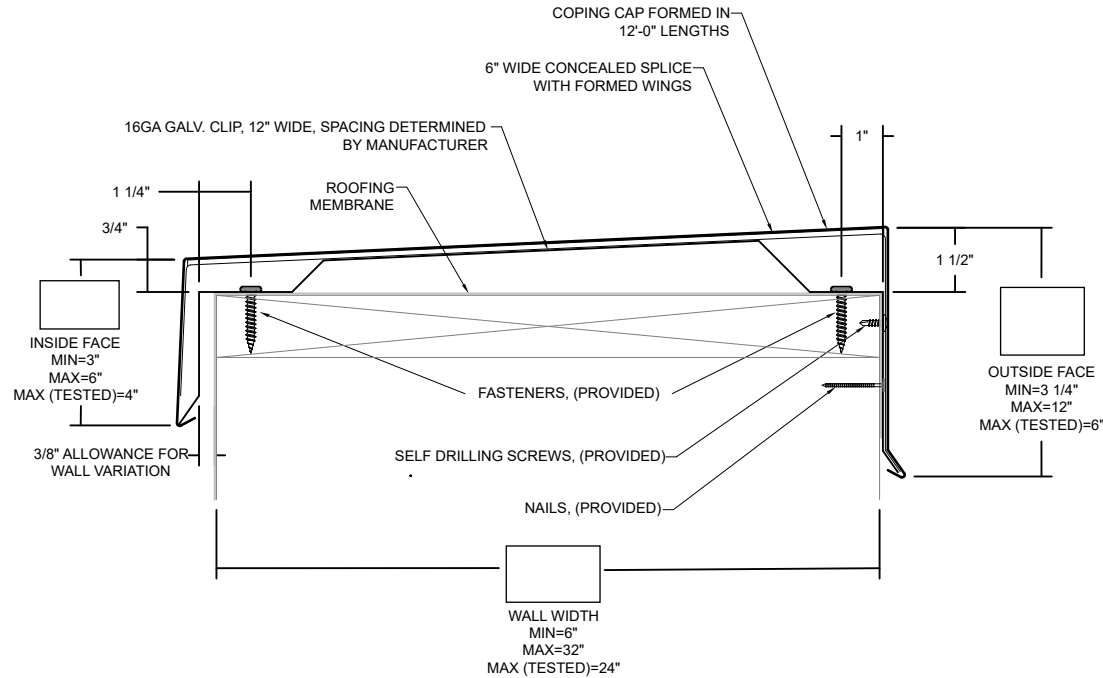

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

**GAF**  
1 Campus Drive,  
Parsippany, NJ 07054  
USA  
973-628-3000  
WWW.GAF.COM

SHT# 1 of 2

DATE: 09/09/22

DRN BY: PL

CKD BY: KP

DWG #: 25011-37090

REV: A

## APPROVALS\*

**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

## MATERIAL\*

- 24 Ga. Galv. Steel
- 22 Ga. Galv. Steel
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: \_\_\_\_\_

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

Substrate:

if substrate is not given, wood fasteners will be provided.

- Wood
- Masonry
- Metal

## QUANTITIES

Accessory Type\* :  Quicklock (Default)  Welded (Surcharge)

\_\_\_\_\_ Straight Lineal Feet (12'-0" Lengths)

\_\_\_\_\_ Total Miters (90°) (Inside: \_\_\_ | Outside: \_\_\_)

\_\_\_\_\_ Total Endcaps (Left: \_\_\_ | Right: \_\_\_)

\_\_\_\_\_ Total Endwall Flashing (Left: \_\_\_ | Right: \_\_\_)

\_\_\_\_\_ Transition Miters

\_\_\_\_\_ T-Miters

\_\_\_\_\_ Z-Miters

\_\_\_\_\_ Radius Lineal Feet (Welded) (4'- 0" Lengths)

\_\_\_\_\_ Radius to Straight Miters (Welded)

\_\_\_\_\_ Radius End Caps

\_\_\_\_\_ Vault Lineal Feet (Welded) (4'- 0" Lengths)

\_\_\_\_\_ Vault to Straight Miters (Welded)

\_\_\_\_\_ Vault End Caps

\_\_\_\_\_ Ridge Miters

\_\_\_\_\_ Valley Miters




# M-WELD SNAP-ON PLUS COPING

## STANDARD ACCESSORIES

### NOTES

For special miter and accessory requirements, contact manufacturer for assistance.

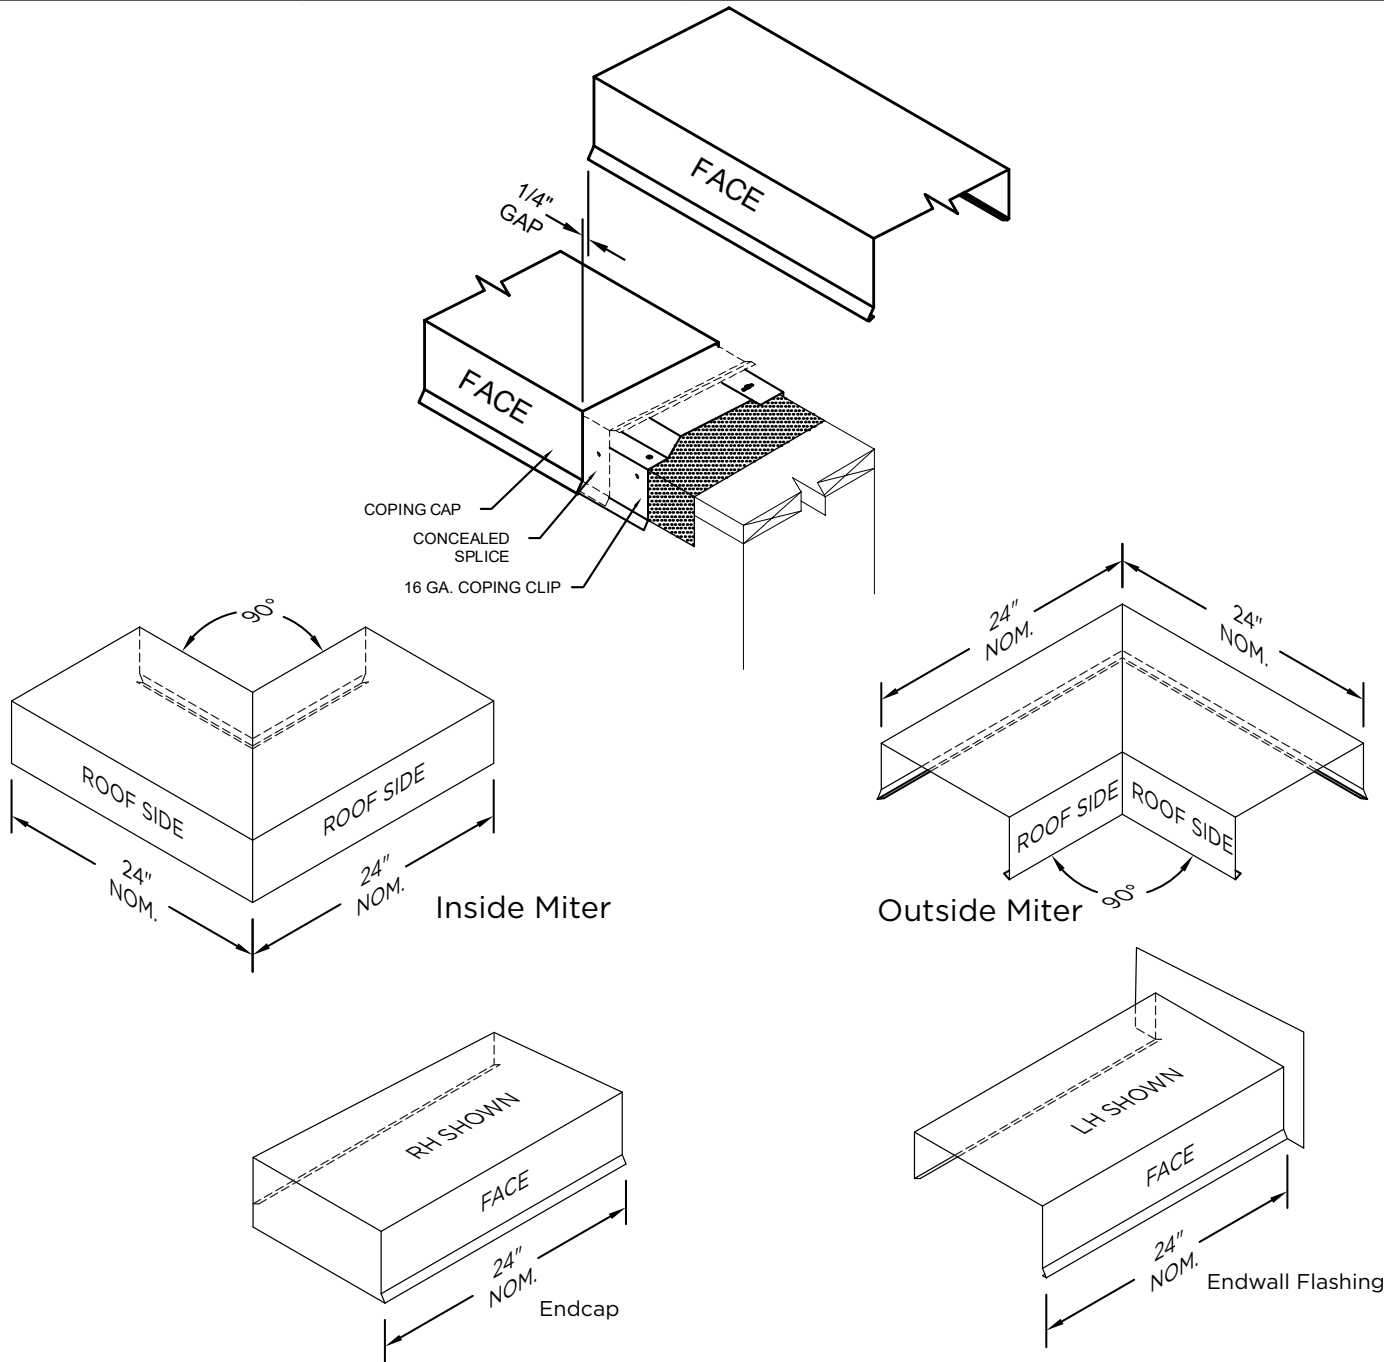

SHT# 2 of 2

DATE: 09/09/22

DRN BY: PL

CKD BY: KP

DWG #: 25011-37090

REV: A

**GAF**  
1 Campus Drive,  
Parsippany, NJ 07054  
USA  
973-628-3000  
WWW.GAF.COM