


EverGuard® PVC WalkwayRoll

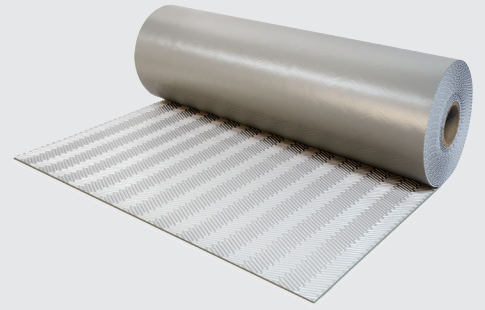

Description:

The EverGuard® PVC Walkway Roll is designed to protect the membrane in areas exposed to rooftop traffic, such as HVAC, hatches, access doors, and transit areas. Manufactured using the GAF Everguard® PVC formulation, Everguard® PVC Walkway Rolls are required on GAF warranted roofing systems.

Product Highlights:

- Great traction with herringbone design
- Walkways have smooth edges for easy weldability
- Comes in standard Gray 30" x 50' (762 mm x 15.24 m) with 2" (51 mm) smooth on both edges
- 125 mil thickness
- 118 lb. (54 kg) per roll

Application:

Heat-weld EverGuard® PVC Walkway Roll to the roof membrane surface continuously around the walkway roll perimeter.

- Walkway rolls must be spaced 6" (152 mm) to allow for drainage.

EverGuard® PVC accessories are designed for use with GAF EverGuard® PVC single-ply membranes and PVC KEE membranes. The factory-built accessories may be installed on mechanically attached, adhered, or RhinoBond® EverGuard® PVC roofing systems.

See published application and specifications manual for detailed instructions.



Visit [gaf.com](https://www.gaf.com)

For additional information, contact GAF Design Services at 1-877-423-7663 or designservices@gaf.com

We protect what matters most™

